



SAFETY BULLETIN 26/21

ACETYLENE PLANT SAFE OPERATING PRESSURES AND TEMPERATURES

ASIA INDUSTRIAL GASES ASSOCIATION

No 2 Venture Drive, # 22-28 Vision Exchange, Singapore 608526

Tel: +65 67055642 Fax: +65 68633307

Internet: <http://www.asiaiga.org> LinkedIn profile: <https://www.linkedin.com/company/asiaigaorg>

ACETYLENE PLANT SAFE OPERATING PRESSURES AND TEMPERATURES

Question

What are the operating pressure and temperature limits for acetylene production plants to keep acetylene in the gaseous phase instead of the more unstable liquid phase?

Answer

The graph of vapour pressure versus temperature is referred to as the Mollier curve, see Figure 1. The curve shows the transition point from gaseous to liquid phase over a range of pressures and temperatures. Acetylene at any pressure-temperature combination below the curve is in the gaseous phase. Acetylene at any pressure-temperature combination above the curve is in the liquid phase. Maintaining the pressure-temperature combination of the acetylene below the curve will keep acetylene in the gaseous phase.

Operating pressure and temperature limits in CGA, EIGA, and NFPA publications are below the Mollier curve in the gaseous phase for acetylene [1, 2, 3].

WARNING: Liquid acetylene has a high explosive potential and shock sensitivity higher than that of gaseous acetylene. For these reasons, acetylene shall not be liquefied.

Methods recommended to keep acetylene in the gaseous phase:

1. Determine the minimum expected temperature for the plant location. For that temperature, determine the maximum operating pressure so the pressure-temperature combination will keep the acetylene in the gaseous phase. Design the plant to maintain the operating pressure below that maximum operating pressure.

NOTE Regulations in certain countries prescribe the maximum operating pressure of acetylene plants.

2. Determine the maximum operating pressure of the plant. For that pressure, determine the minimum temperature so the pressure-temperature combination will keep the acetylene in the gaseous phase. Design the plant to shut down when the temperature drops to the minimum set point.

NOTE Maximum operating pressure is the maximum pressure at which the process is intended to operate. This determines the maximum setting of the high-pressure switch or the minimum setting of the low temperature switch.

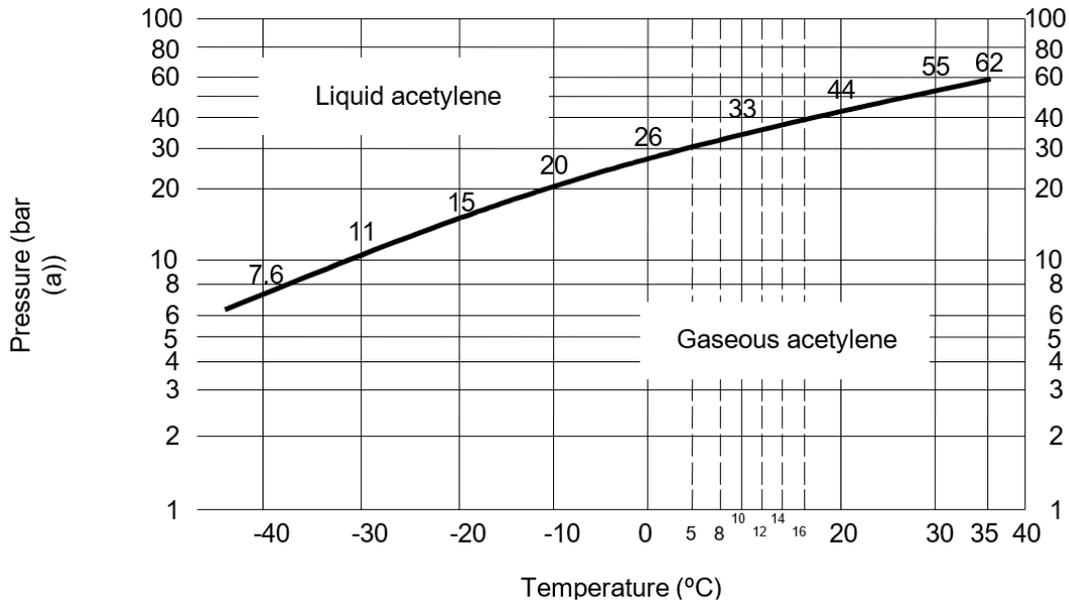


Figure 1—Mollier curve for acetylene [1]

Reasons

For gaseous acetylene at a given pressure-temperature combination, raising the pressure, lowering the temperature, or both can move the pressure-temperature combination closer to the Mollier curve. Continued increase in pressure, decrease in temperature, or both can move the pressure-temperature combination above the Mollier curve, which will change gaseous acetylene to liquid acetylene.

References

Unless otherwise specified, the latest edition shall apply.

- [1] AIGA 022, *Code of Practice: Acetylene*, Asia Industrial Gases Association www.asiaiga.org
- [2] CGA G-1.6, *Standard for Mobile Acetylene Trailer Systems*, Compressed Gas Association, Inc. www.cganet.com
- [3] NFPA 55, *Compressed Gases and Cryogenic Fluids Code*, National Fire Protection Association. www.nfpa.org
- [4] EIGA TB 34, *Acetylene Plant Safe Operating Pressures and Temperatures*, www.eiga.eu

As part of a programme of harmonisation of industry standards, the Asia Industrial Gases Association has issued Safety Bulletin 26, *Acetylene Plant Safe Operating Pressures and Temperatures*, jointly produced by members of the International Harmonisation Council and originally published as Technical Bulletin 34 by European Industrial Gases Association (EIGA) as *Acetylene Plant Safe Operating Pressures and Temperatures*.

This publication is intended as an international harmonised standard for the worldwide use and application of all members of the Asia Industrial Gases Association (AIGA), Compressed Gas Association (CGA), European Industrial Gases Association (EIGA), and Japan Industrial and Medical Gases Association (JIMGA). Each association's technical content is identical, except for regional regulatory requirements and minor changes in formatting and spelling.

Disclaimer

All technical publications of AIGA or under AIGA's name, including Codes of practice, Safety procedures and any other technical information contained in such publications were obtained from sources believed to be reliable and are based on technical information and experience currently available from of AIGA and others at the date of their issuance.

Where AIGA recommends reference to or use of its publications by its members, such reference to or sue of AIGA's publications by its members or third parties are purely voluntary and not binding.

Therefore, AIGA or its members make no guarantee of the results and assume no liability or responsibility in connection with the reference to or use of information or suggestions contained in AIGA's publications.

AIGA has no control whatsoever as regards, performance or non-performance, misinterpretation, proper or improper use of any information or suggestions contain in AIGA's publications by any person or entity (including AIGA members) and AIGA expressly disclaims any liability in connection thereto.

AIGA's publications are subject to periodic review and users are cautioned to obtain the latest edition.

© Reproduced with permission from European Industrial Gases Association. All Rights Reserved.